
1,500A 1.2kV Class (HTN) Molded 1" Tri-Clamp Secondary Bushing



ECI, ERMCO Components Inc. 1607 Industrial Road Greeneville, TN 37745 Phone: (423) 638-2302 Toll Free: (877) 267-1855 Fax (423) 636-6492

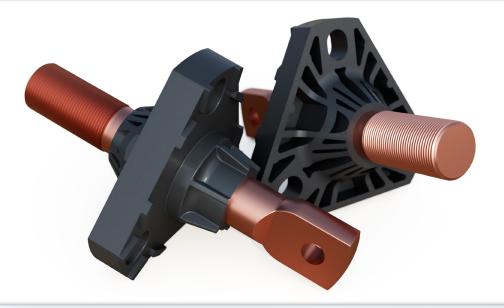

Voltage Ratings and Characteristics

Description	kV
Standard Voltage Class	1.2
AC 60 Hz 1 Minute Withstand	10
BIL and Full Wave Crest	30

Current Ratings and Characteristics

Description	Amperes Continuous	
1 Inch Copper Stud	1,500 A rms in Transformer Oil	

Current ratings and characteristics are in accordance with IEEE Std. C57.12.00 $^{\rm TM}$ standard

BEYOND THE STANDARD

Ordering Information

Table 1


Tri-Clamp and Gasket

Catalog Number	Description	
9U10TGA601	Tri-Clamp and Gasket	
90101GA001	Usable Thread - 1.75"	
01110TC A 701	Tri-Clamp and Gasket	
9U10TGA701	Usable Thread - 2.25"	
01.110TC A 001	Tri-Clamp and Gasket	
9U10TGA801	Usable Thread - 3.00"	

Table 2

Replacement Parts

Catalog Number	Description	
9U10PRT005	Mounting Gasket	
4391ZR1199	1"-14 Brass Hex Jam Nut 1/4" Thick	
4391ZR1299	1"-14 Brass Hex Jam Nut 1/2" Thick	

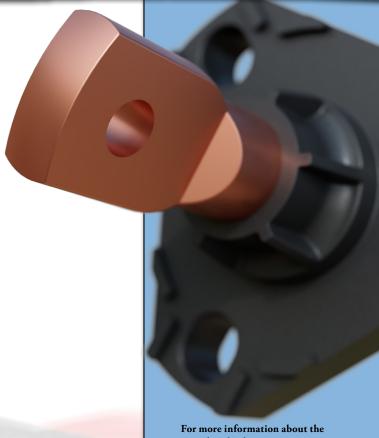

For more information about the secondary bushing, contact your Ermco Components representative or call (877) 267-1855 Note: Dimensions are given for reference only

Catalog Number	A	В	С
9U10TGA601	6.75"	2.10"	1.75"
9U10TGA701	7.25"	2.60"	2.25"
9U10TGA801	8.00"	3.35"	3.00"

Primary dimensions are inches Secondary dimensions [] are mm 2.40" Mounting surface [60.96] -"B"-Ø0.437"-– "C" Min. – Usable thread [11.09] Ø1.74" [44.19] [31.49] 1-14 UNS - 2A 0.62" [15.75] 1.50" *Flat* [38.10] 2.25" [57.15] 0.98" 0.62" [24.89][15.75] 120° 0.47" [11.9] Gasket surface Ø3.375" [85.73]
Bolt circle for 0.375" stud 0.59" [14.9]

Bulletin 2019002 | November 2019 | November 2019 | Page 2

